




Ku-Band Receive Reject Filter

Model 16607

This low loss uplink filter provides full band downlink suppression in a compact, yet robust package.

Specifications:

Passband:	13.75 - 14.50 GHz
Insertion Loss:	0.25 dB Typ
VSWR:	1.20:1 Max
Reject Band:	10.70 - 12.75 GHz
Rejection:	70 dB Min
Power:	0.5 KW
Flanges:	See Chart
Weight:	0.4 lbs (0.2 Kg)
Dimensions:	4.25" x 1.5" x 1.5" (108mm x 38mm x 38mm)
Finish:	Gloss White Lacquer

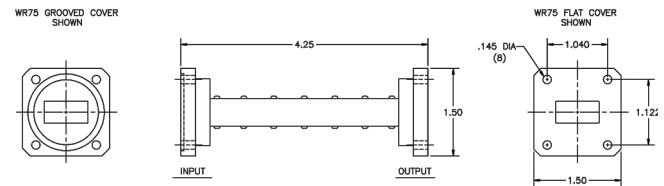

Model 16607-G/F

<u>Model</u>	<u>Input Flange</u>	<u>Output Flange</u>
16607	WR75 Flat	WR75 Flat
16607-G/F	WR75 Grooved	WR75 Flat
16607-F/G	WR75 Flat	WR75 Grooved
16607-G/G	WR75 Grooved	WR75 Grooved

Alternate flange configurations are available upon request.

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com