
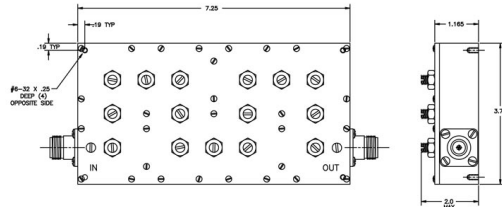


PCS-1900 Bandpass Filters

PCS Receive Filter

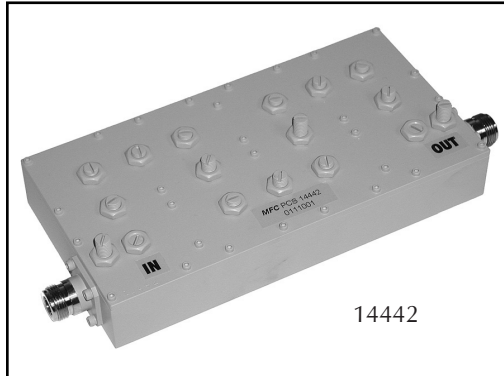

Model 14442

Ideal for use in broadcast-dense locations, this bandpass filter provides superior isolation from virtually all undesired transmissions ... from AM to WiMax!

Specifications:

Passband Receive	1850-1910 MHz
Passband Insertion Loss	1.0 dB Max
Passband Return Loss	18 dB Min
Rejection	
DC-1830 MHz	60 dB Min
1930-1990 MHz	70 dB Min
1990-3930 MHz	55 dB Min
Operating Temperature	-25°C to +70°C
Storage Temperature	-40°C to +85°C
Operating Humidity	Up to 90%, Non-Condensing
Impedance	50 ohms
Connectors	See chart below

Model #	Connector Configuration	
	Input	Output
14442	N Female	N Female
14442-1	N Male	N Female



MICROWAVE FILTER COMPANY, INC.

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610

www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700