

# BAS (2 GHz) Bandpass Filters




## **Full Band BAS Bandpass Filter**

This bandpass filter is ideal for isolating the entire BAS band - operating on channels A1-A7 (2025-2110 MHz) - from other surrounding communication services, such as the PCS and BRS-EBS bands.

The model 15956 offers low insertion loss and is suitable for indoor or outdoor use.

### **15956 Specifications:**

	<b>15956</b>
Passband .....	2025-2110 MHz
Passband Loss .....	2 dB Max
Rejection .....	45 dB Typ @ 1995 MHz
Impedance .....	50 ohms
Connectors .....	SMA (Female)
Operating Temperature .....	-20° to +60°C
Weatherized for outdoor use	

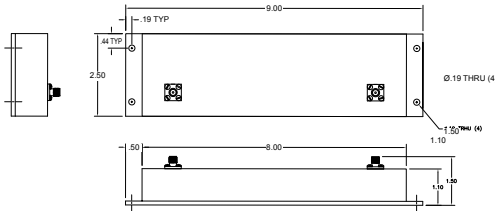

**MICROWAVE FILTER CO., INC.**  
 6743 KINNE STREET, E. SYRACUSE, NY 13057  
 E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

**800-448-1666 • 315-438-4700**  
 Web: [www.microwavefilter.com](http://www.microwavefilter.com)