

# 2 GHz TV Mobile Microlinks Bandpass Filter (Brazil)

## Model 19216



This bandpass filter isolates this auxiliary TV band from potential interference caused by other sources of communication (e.g. – fixed wireless services).

### Specifications:

Passband ..... 2325 – 2345 MHz  
 Passband Loss ..... 1.5 dB Approx; 2 dB Max  
 Passband VSWR ..... 1.5:1 Max  
 Rejection ..... 30 dB Approx @ 2305 MHz  
 ..... 30 dB Approx @ 2365 MHz  
 Impedance ..... 50 ohms  
 Connectors ..... N – male (Input)  
 ..... N – female (Output)  
 Operating Temp ..... +60 °F to +90 °F

Indoor/Outdoor Use - Non-Weatherized\*

\* Requires placement in weatherized housing for outdoor use

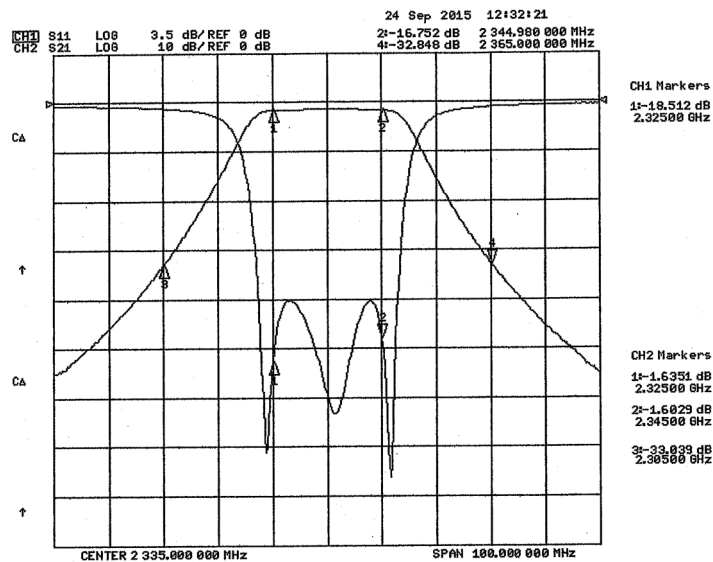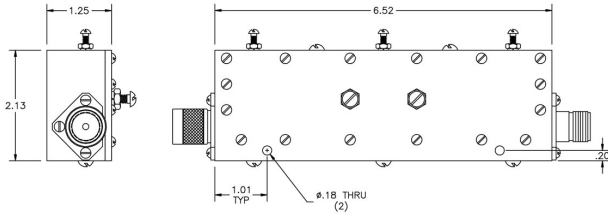

**MICROWAVE FILTER COMPANY, INC.**

6743 Kinne Street, East Syracuse, NY 13057 • Toll Free: 800-448-1666 or 888-206-6610  
 www.microwavefilter.com • email: mfcsales@microwavefilter.com • International: 315-438-4700