



L-Band Telemetry Bandpass Filter

Models 18758 & 18759

These bandpass filters isolate these telemetry bands from other surrounding L-band operations.


Typical Applications:

- Radio Astronomy
- Meteorological Satellite Services

Model 18758

Specifications:


Center Frequency (Fo):	1680 MHz
Insertion Loss @ Fo:	2.5 dB Typ; 3.0 dB Max
VSWR @ Fo:	1.43:1 Typ
Relative Bandwidth (3 dB):	70 MHz Typ
Rejection:	45 dB Min @ 1600 / 1780 MHz 70 dB Min from DC-1500 MHz 70 dB Min from 1950-3000 MHz
Impedance:	50 ohms
Connectors:	SMA-female (In) / SMA-male (Out)
Dimensions:	1.25" x 0.43" x 0.43" (32mm x 11mm x 11mm)

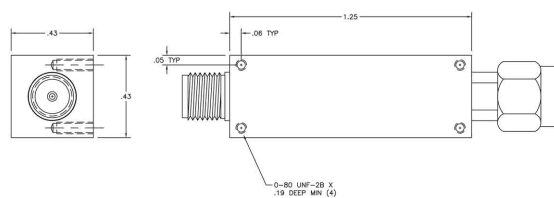

Model 18759

Specifications:

Center Frequency (Fo):	1675 MHz
Insertion Loss @ Fo:	2.0 dB Typ
Passband VSWR:	1.5:1 Max
Relative Bandwidth (1 dB):	50 MHz Min
Rejection:	20 dB Typ @ Fo +/- 36 MHz 50 dB Typ @ Fo +/- 52 MHz
Impedance:	50 ohms
Connectors:	SMA-female
Dimensions:	4.75" x 0.75" x 1.24" (121mm x 19mm x 31mm)

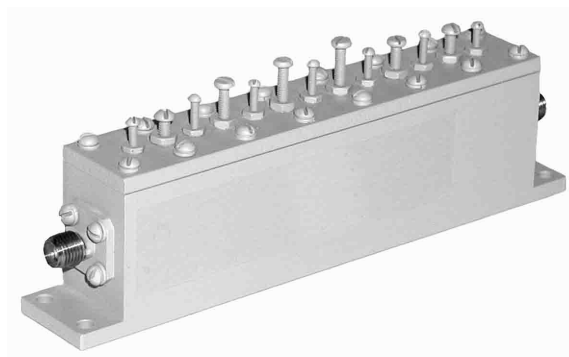

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com