




# **2 way Reactive Power Divider**

## **RD-3527-200-02N**

### **Specifications:**

Frequency Range:	350-2700 MHz
Insertion Loss:	3.2 dB Max
VSWR:	1.30:1 Max
Power:	200 Watts
Impedance:	50 Ohms
Connectors:	N female
Operating Temp. Range:	-35°C to +60°C
Relative Humidity:	5% - 95%

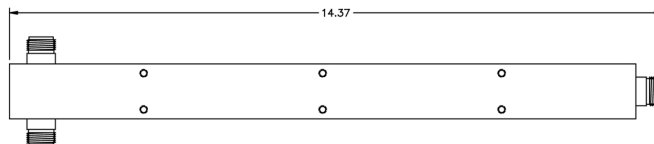

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)